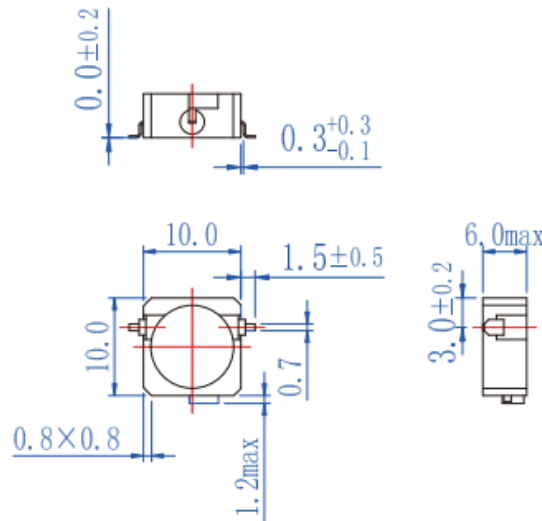


Type: Surface Mount Isolator series
Model no.: YXS1102K-04
Features

1. Frequency range is from 1500MHz to 2200MHz
2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
3. Customized Designs are available per request

Electronic parameters at room temperature (25°C aro.)

P/N.	Frequency Range	Relative Bandwidth	Insertion Loss	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
	(GHz)		(dB.Max)							
YXS1102K-04	1.5-2.2	1% (18.5MHz)	0.4	20	1.25	-40 ~ +85	10	-	Clockwise	SMD

Mechanical Dimensions (unit: mm)


Pls provide below information when inquiring

The specific working frequency range

- 1- Required specification on IL, Isolation and VSWR
- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details