

Type: Coaxial Isolator series


Features

- 1. Frequency range is from 1.35GHz to 2.7GHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

P/N.	Frequency Range (GHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCI201-C2	1.35-2.7	100%	0.6	17	1.35	-0~+60	10	-	-	SMA
		(1350MHz)								

Electronic parameters at room temperature (25°C aro.)

Mechanical Dimensions (unit: mm)

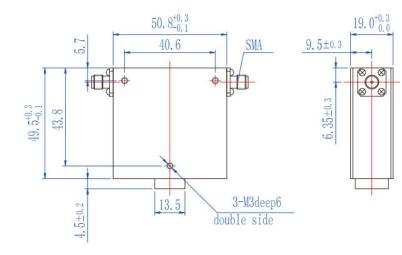

Pls provide below information when inquiring

The specific working frequency range

1- Required specification on IL, Isolation and VSWR

Model no.: YXCI201-C2

- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details