



Type: Coaxial Isolator series

Features


Model no.: YXCI501-B


- 1. Frequency range is from 2GHz to 6GHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

Electronic parameters at room temperature (25°C aro.)

P/N.	Frequency Range (GHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCI501-B	2-6	100% (4000MHz)	1.2	15	1.5	-0~+60	10	-	-	N/SMA

Mechanical Dimensions (unit: mm)



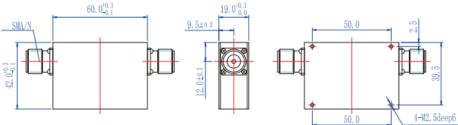

Pls provide below information when inquiring

The specific working frequency range

- 1- Required specification on IL, Isolation and VSWR
- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details

 Quanzhou Seven Sunlight Electronic Co., Ltd.

 Web:
 www.sevensunlight.com

 Email:
 sales@ sevensunlight.com