



Type: Coaxial Circulator series

Features

- 1. Frequency range is from 4GHz to 8GHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

Electronic parameters at room temperature (25°C aro.)

P/N.	Frequency Range (GHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCC601K	4-8	66.66%	0.6	18	1.30	-20 ~ +65	20	-	-	N/SMA
		(4GHz)								

Mechanical Dimensions (unit: mm)


Pls provide below information when inquiring


The specific working frequency range

1- Required specification on IL, Isolation and VSWR

Model no.: YXCC601K

- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details

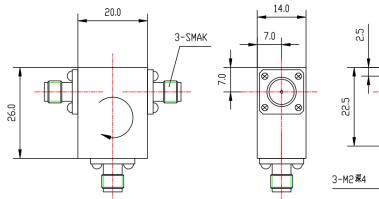



Quanzhou Seven Sunlight Electronic Co., Ltd.

Web: www.sevensunlight.com Email: sales@ sevensunlight.com