



Type: Coaxial Isolator series


Features

- 1. Frequency range is from 0.25GHz to 0.45GHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

Electronic parameters at room temperature (25°C aro.)

P/N.	Frequency Range (GHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCI0301A	0.25-0.45	10%	0.4	20	1.25	-15 ~ +60	10	-	-	N/SMA
		(35MHz)								

Mechanical Dimensions (unit: mm)

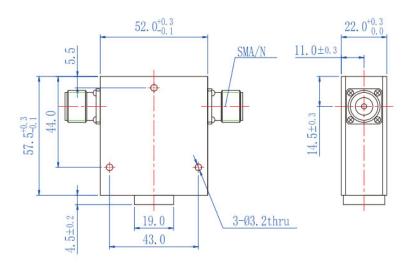

Pls provide below information when inquiring

The specific working frequency range

1- Required specification on IL, Isolation and VSWR

Model no.: YXCI0301A

- 2- Power handling
- Connector type
- 4- Other specific requirement details

Quanzhou Seven Sunlight Electronic Co., Ltd.

Web: www.sevensunlight.com Email: sales@sevensunlight.com