

Type: Coaxial Isolator series

Features

- 1. Frequency range is from 18GHz to 24.5GHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

P/N.	Frequency Range (GHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (℃)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCI2001	18-24.5	10% (2125MHz)	0.6	18	1.35	-40 ~ +70	10	-	-	SMAK

Electronic parameters at room temperature (25°C aro.)


Mechanical Dimensions (unit: mm)

Pls provide below information when inquiring

The specific working frequency range

- 1- Required specification on IL, Isolation and VSWR
- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details

Quanzhou Seven Sunlight Electronic Co., Ltd. Web: <u>www.sevensunlight.com</u> Email: sales@ sevensunlight.com

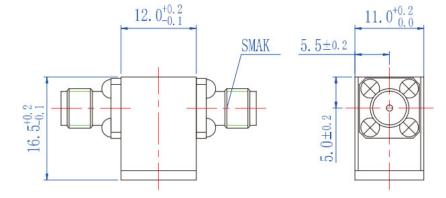

Model no.: YXCI2001