



## Type: Coaxial Circulator series


Features

- 1. Frequency range is from 1.2GHz to 2.5GHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

Electronic parameters at room temperature (25°C aro.)

P/N.	Frequency Range (GHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp.  (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCC101-A	1.2-2.5	10% (185MHz)	0.3	23	1.2	-40 <b>~</b> +85	100	1	-	N/SMA

Mechanical Dimensions (unit: mm)

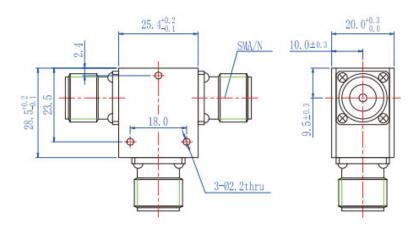

Pls provide below information when inquiring

The specific working frequency range

1- Required specification on IL, Isolation and VSWR

Model no.: YXCC101-A

- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details

Quanzhou Seven Sunlight Electronic Co., Ltd.

Web: <a href="https://www.sevensunlight.com">www.sevensunlight.com</a> Email: <a href="mailto:sales@sevensunlight.com">sales@sevensunlight.com</a>