

Type: Coaxial Circulator series


Features

- 1. Frequency range is from 328MHz to 336MHz
- 2. Reliable performance and competitive cost guaranteed by high quality materials and optimized design.
- 3. Customized Designs are available per request

P/N.		Frequency Range (MHz)	Relative Bandwidth	Insertion Loss (dB.Max)	Isolation (dB.Min)	VSWR (Max)	Operating Temp. (°C)	Forward Power (W)	Reverse Power (W)	Direction	Connector
YXCC0301-	201 4	328-336	100%	0.4	23	1.2	-15~+60	100-	-	-	
	01-A		(8MHz)								

Electronic parameters at room temperature (25°C aro.)

Mechanical Dimensions (unit: mm)

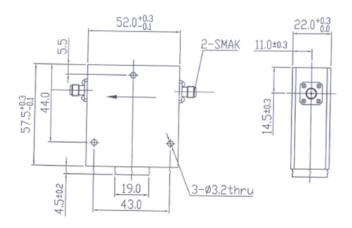

Pls provide below information when inquiring

The specific working frequency range

1- Required specification on IL, Isolation and VSWR

Model no.: YXCC0301-A

- 2- Power handling
- 3- Connector type
- 4- Other specific requirement details